




Z LED ECO

Z LED ECO Highbay 2 Cool White Code: AZLE2/1/CW

Category	High/Low Bay
Application	Ancillary, Hospitality, Industrial, Retail
Specification	Performance

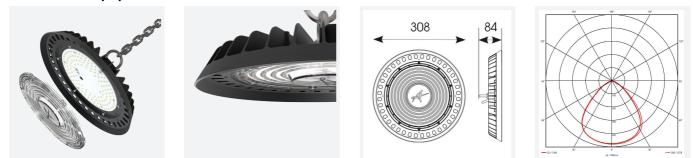

PRODUCT FEATURES

- Sleek and robust LED low/high bay for industrial applications and ancillary areas
- Lensed diffuser design helps to control the beam angle, offering better light distribution
- Integral on-board driver reduces the overall size and weight of product, resulting in a slim, lightweight and easy to install unit
- Alternative installation options by means of drop rods, jack chain and catenary wire.

GENERAL INFORMATION		
Wattage	150W	
Lumens Delivered	17500lm	
Lm/W	120lm/W	
Beam Angle	90	
CRI	80	
CCT	4000K	
Input	220/240V	
Operating Temp	-45°C - 45°C	
SDCM	6	
UGR	28	
Energy efficiency class	E	

- Die-cast powder coated construction and heatsink for optimum thermals and performance
- High efficiency up to 120lm/w
- Installation eye-bolt supplied as standard
- IP66 and IK09 ratings

TECHNICAL INFORMATION			
Light Source	LED		
Colour / Finish	Black		
IP Rating	IP66		
Class Protection	1		
Internal / External	Internal / External		
Surface / Recessed / Suspended	Suspended		
Lumen Depreciation	L80 54,000h		
Warranty (Years)	3		
CE Mark	Yes		
Diameter	308 mm		
Height	84 mm		