



Electronic
reversing starter
with STO, 2.4A
ME024RSD024

Product designation

Product type designation

Electrical features

Function	Reversing starter	
Rated operational voltage	V	40...500
Rated frequency	Hz	50/60
Auxiliary supply voltage	24VDC	
Rated current AC-3, AC-53a	A	2.4
Thermal protection	Integrated, class 10A	
Thermal trip adjustment range	0.18...2.4A	
Safe torque Off (STO) safety function	Built-in	
IEC 61508 Safety Integrity Level	SIL3	
ISO 13849-1 performance level	PL e	

Digital outputs

Number of outputs	Nr.	3
Output type	1 relay output with C/O contact +2 PNP digital outputs	
Output contacts ratings	Relay output: 3A 230V AC15, 2A 24V DC13 Digital outputs: 40mA 24VDC	


Mechanical features

Terminals type				Screw			
Conductor section							
AWG/kcmil conductor section				min		24	
				max		14	
IEC				min		mm ²	0.2
				max		mm ²	2.5
Tightening torque for terminals max				Nm		0.6	
Cable stripping lenght				mm		8	
Operating position							
				normal		Vertical	
Fixing				35mm DIN rail (IEC/EN/BS 60715)			
Weight				g		300	
Operations							
Mechanical life				cycles		15 million	

Operations


Mechanical life	cycles	15 milion
-----------------	--------	-----------

Electrical life	cycles	50 million
Ambient conditions		
Operating temperature	min	°C -25
	max	°C +70
Storage temperature	min	°C -25
	max	°C +80
Relative humidity	%	20...90
Resistance & Protection		
Rated insulation voltage Ui	V	500
Rated surge voltage	kV	6
Frontal IP degree		IP20
Terminals IP degree		IP20
Pollution degree		2
Dimensions		

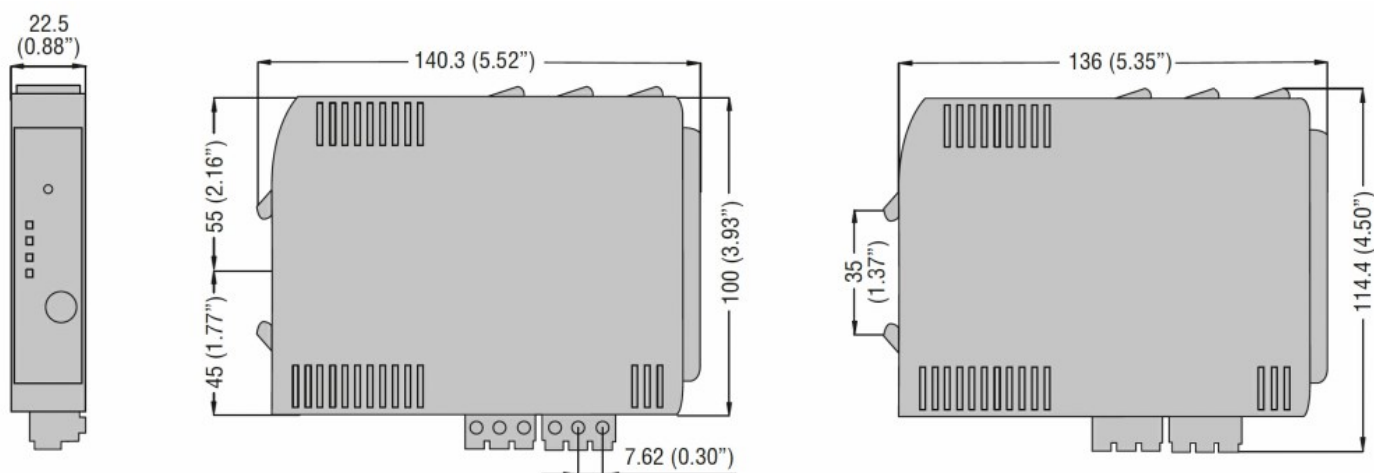


Wiring diagrams


Wiring diagram for three-phase motors

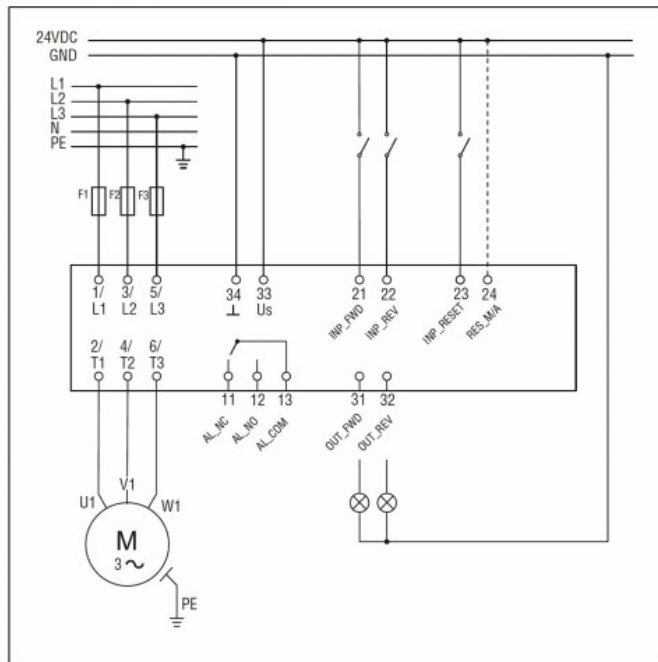


Wiring diagram for single-phase motors

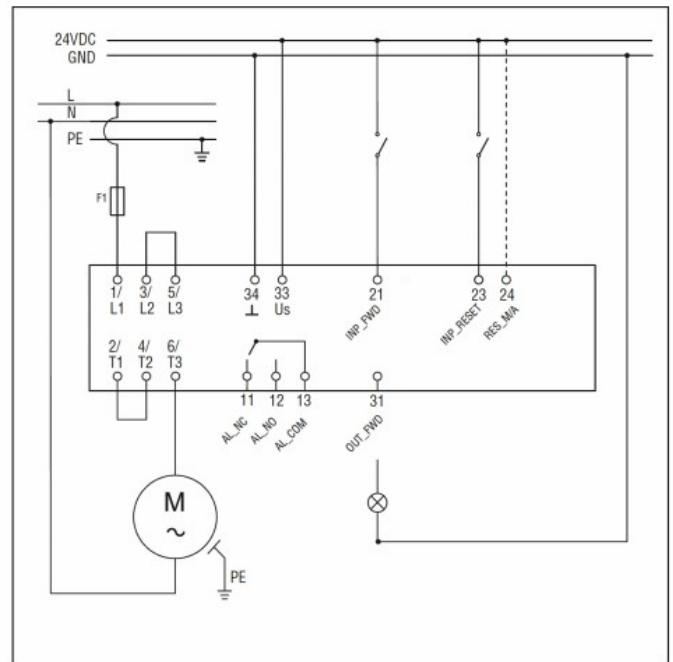

Wiring diagram for three-phase motors for safety applications

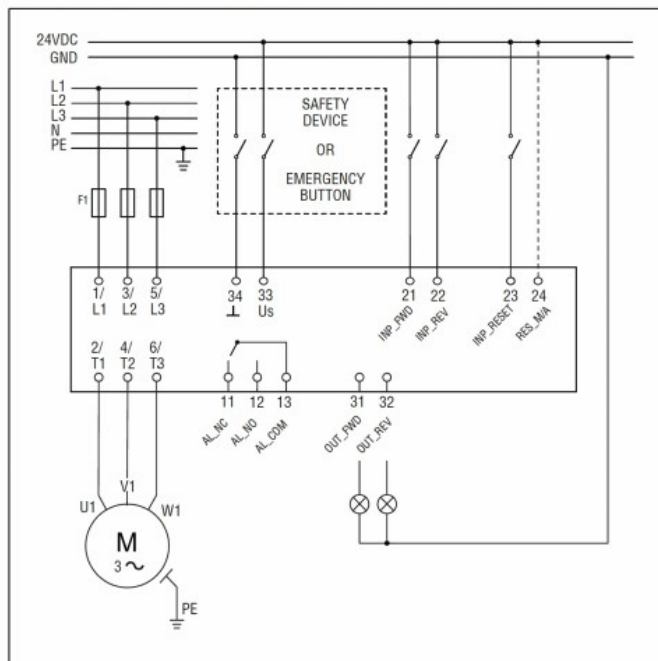

Wiring diagram for single-phase motors for safety applications

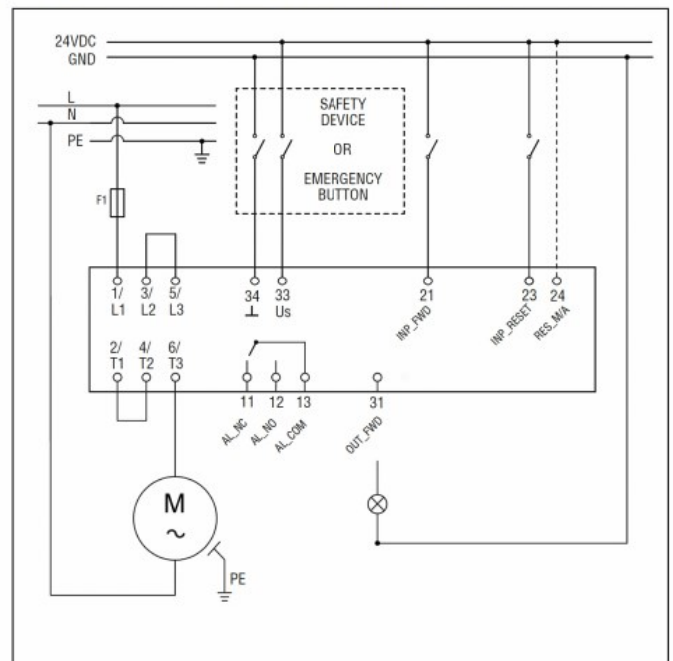

Certifications and compliance

Compliance

CSA C22.2 n° 60947-4-2

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -
Motor starter /
Motor starter
combination