Specifications



Base unit with top cover for modular tower lights, Harmony XVU, silver, 60mm, 24V AC DC

XVUC21BQ

Product availability: Stock - Normally stocked in distribution facility

Main

| Range of Product | Harmony XVU |
|------------------------------------|---------------------|
| Product or Component Type | Modular tower light |
| Beacon or indicator bank unit type | Base unit |
| Mounting diameter | 2.4 in (60 mm) |
| Component name | XVU |
| Housing Colour | Silver |

Complementary

| · · · · · · · · · · · · · · · · · · | |
|-------------------------------------|---|
| Kit composition | Base unit Cover |
| Fixing Mode | Direct or tube fixing |
| Material | PBT (polybutylene terephthalate) V-0 UL 94 ABS (acrylonitrile butadiene-styrene) V-0 UL 94 PC (polycarbonate) V-0 UL 94 |
| Assembly style | Customer assembly, up to 5 units |
| [Us] rated supply voltage | 24 V AC/DC - 1510 % |
| Current consumption | <= 400 mA |
| Length | 3.03 in (77 mm) |
| Product Weight | 0.24 lb(US) (0.11 kg) |
| | |

Environment

| Product Certifications | CSA UL CE |
|--|----------------------|
| Ambient Air Temperature for Storage | -40158 °F (-4070 °C) |
| Ambient air temperature for operation | -13122 °F (-2550 °C) |
| Vibration resistance | 2 gn |
| IP degree of protection | IP65 |

Ordering and shipping details

| Category | US100XV22618 |
|-------------------|---------------|
| Discount Schedule | 00XV |
| GTIN | 3606480555923 |
| Returnability | Yes |

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

| Country of | origin | |
|------------|--------|--|
|------------|--------|--|

Packing Units

| r doning onito | |
|------------------------------|---------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 10.55 in (26.800 cm) |
| Package 1 Width | 3.58 in (9.100 cm) |
| Package 1 Length | 3.54 in (9.000 cm) |
| Package 1 Weight | 10.088 oz (286.000 g) |
| Unit Type of Package 2 | S04 |
| Number of Units in Package 2 | 24 |
| Package 2 Height | 11.81 in (30.000 cm) |
| Package 2 Width | 15.75 in (40.000 cm) |
| Package 2 Length | 23.62 in (60.000 cm) |
| Package 2 Weight | 18.089 lb(US) (8.205 kg) |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 96 |
| Package 3 Height | 31.50 in (80.000 cm) |
| Package 3 Width | 29.53 in (75.000 cm) |
| Package 3 Length | 23.62 in (60.000 cm) |
| Package 3 Weight | 87.303 lb(US) (39.600 kg) |
| | |

🜔 Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability \geq

| Carbon footprint (kg CO2 eq, Total Life cycle) | 2 | | |
|--|-------------------------------|--|--|
| Environmental Disclosure | Product Environmental Profile | | |

Use Better

| [⊗] Materials and Substances | |
|--|---|
| Packaging made with recycled cardboard | Yes |
| Packaging without single use plastic | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| SCIP Number | C06fce4f-aea2-46a5-aadb-0b38d1efbe3f |
| REACh Regulation | REACh Declaration |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |


Use Again

| U | \odot Repack and remanufacture | | |
|---|----------------------------------|-------------------------|--|
| | Circularity Profile | End of Life Information | |
| | Take-back | No | |

Dimensions Drawings


Base Unit DC

Dimensions



Mounting and Clearance

Modular Tower Lights Mounting

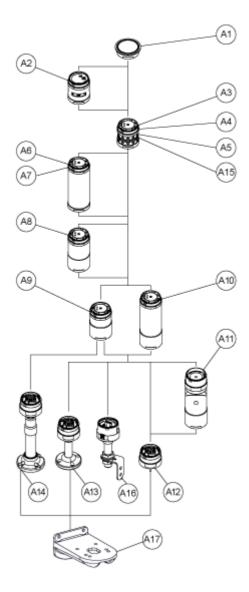


| Drawing | Part number | Part name |
|------------|-------------|----------------------|
| A1 | - | Top cover |
| | - | Top cover (Silver) |
| A2 | XVUC9S | Buzzer unit |
| A 2 | XVUC9SQ | Buzzer unit (Silver) |
| A3 | XVUC23 | Green LED unit |
| | XVUC24 | Red LED unit |
| | XVUC25 | Orange LED unit |
| | XVUC26 | Blue LED unit |

| | Part number | Part name | |
|-----|-------------|---|--|
| | XVUC27 | White LED unit | |
| | XVUC28 | Yellow LED unit | |
| A4 | XVUC29 | Multi-LED unit | |
| A5 | XVUC29P | Multi-LED unit, Pulse signal | |
| A6 | XVUC9V | Sound unit | |
| A7 | XVUC9VP | Sound unit, Pulse signal | |
| A 9 | XVUC020 | Extender | |
| A8 | XVUC020Q | Extender (Silver) | |
| •• | XVUC21B | DC body | |
| A9 | XVUC21BQ | DC body (Silver) | |
| | XVUC21M | AC body NPN | |
| A10 | XVUC21MP | AC body PNP | |
| | XVUC21MQP | AC body PNP (Silver) | |
| A11 | XVUZ06 | Flexible option | |
| | XVUZ01 | Fixing Unit - Direct mounting (3 pins) | |
| | XVUZ01Q | Fixing Unit - Direct mounting (Silver,3 pins) | |
| A12 | XVUZ03 | Fixing Unit - Direct mounting (2 pins) | |
| | XVUZ04 | Fixing Unit - Direct mounting (4 pins) | |
| | XVUZ02 | Fixing Unit - Plate with Pole (100 mm) | |
| | XVUZ02Q | Fixing Unit - Plate with Pole (100 mm, Silver) | |
| A13 | XVUZ400 | Fixing Unit - Plate with Pole (400 mm) | |
| | XVUZ800 | Fixing Unit - Plate with Pole (800 mm) | |
| A14 | XVUZ05 | Fixing Unit - Plate with adjustment pole (100-385 mm) | |
| A15 | XVUC43 | Green LED unit, Flash | |
| | XVUC44 | Red LED unit, Flash | |
| | XVUC45 | Orange LED unit, Flash | |
| | XVUC46 | Blue LED unit, Flash | |

| Drawing | Part number | Part name |
|---------|-------------|--|
| | XVUC47 | White LED unit, Flash |
| | XVUC48 | Yellow LED unit, Flash |
| | XVUZ100T | Fixing Unit - Metal bracket with pole (100 mm) |
| A16 | XVUZ250T | Fixing Unit - Metal bracket with pole(250 mm) |
| | XVUZ400T | Fixing Unit - Metal bracket with pole (400 mm) |
| A17 | XVUZ12 | Fixing plate for use on vertical support - black |

Connections and Schema


Illuminated Units, Multi-LED and Audible Units Wiring

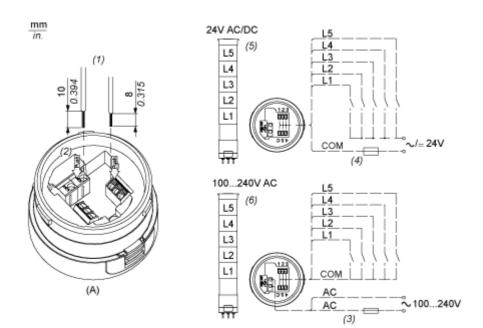

- (A) Fixing Unit
- (1) Dimensions of Wiring size
- (2) Push-in Wire Connectors
- (3) Fuse : 2A ,250V
- (4) Fuse : 0.5A ,125V
- (5) Modular Tower Lights 24V AC/DC
- (6) Modular Tower Lights 100...240V AC
- L1 to L5 : Illuminated LED Units


Technical Illustration

Dimensions

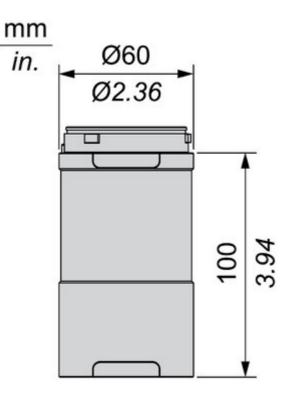

Technical Illustration

Wiring diagram

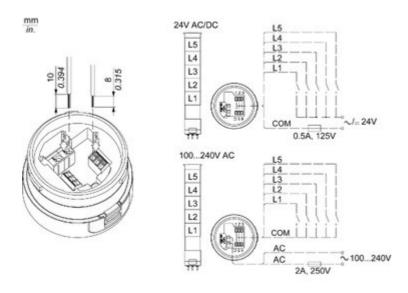

Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features



Image of product / Alternate images

Alternative







