


QUOTATION: 031125/NMP04

Item 1 (TMT1024X0698*)

Series TMT - Three-phase transformer in metal box for voltage measurement COPPER

Technical Characteristics

Rating	15 VA(Cl.0.2)
Input voltage	690 V+N
Output voltage	400 V+N
Frequency	50/60 Hz
Connection group	YNYN0
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	45 °C
Thermal rating	6 times nominal rating
Overvoltage	1,2 times nominal voltage
Temperature rise	Class B - 130°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61869-3, CE
Mounting	Screws

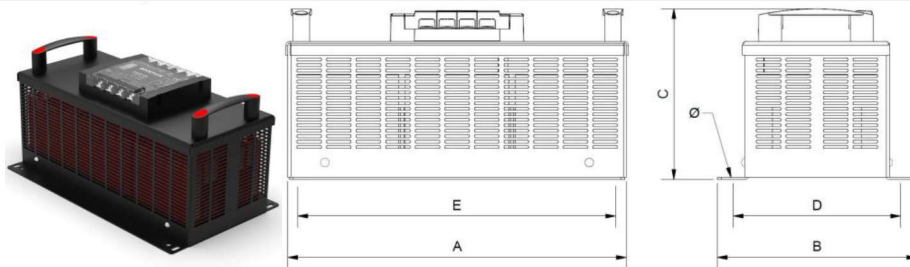

Item	Reference*	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Ø (mm)	Weight (kg)
1	TMT1024X0698	347	202	175	175	327	7Ø	15 kg

Remark: The dimensions stated at this quotation are approximated and can be modified without previous notification.
Polylux does not accept returns of custom-made products once delivered or cancellation once manufactured.