

7 **7 Years**
Product Warranty
UK Only

2 **2 Years**
On-Site Warranty
Main-land UK Only

Kosnic 

Manot 2 in 1

07811 MAN0305/SST

Manot 2 in 1 dual-mode standadt & self-test EME

- Select standard or self-test mode via the internal dual-mode DIP switch
- Automatic self-test conforming to BS-EN-62034
- To set the duration test interval, press the push switch twice
- Used as emergency exit sign as well as emergency light
- Maintained and non-maintained option
- Surface-mounting positions
- IP65 and IK10 (vandal resistant) for external uses
- BESA box fitting points

Overview

The Manot LED Emergency Exit

Bulkhead is a self-contained, robust, maintained or non-maintained 3

hour emergency solution. Can be surface mounted, recessed or installed with a tilting bracket.

Comes with upward arrow exit sign for wall mounting and can be used without signs as an emergency light.



IP65



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Protection	Class II
Rating	
Installation	Internal and External
Area	
UEM/EME Protection	Class II



Technical Summary

Product Code	MAN0305/SST
Default Power	5 W
Default CCT	6,500 K
Lumens Output Maximum	60 lm
Maximum Efficiency	30 lm/W
Emergency Luminous Flux	60 lm
Maintained Luminous Flux	150 lm
Weight	0.65Kg
Dimensions (L x W x D) (mm)	325x158x48
BESA Entry	True
UEM/EME Battery Life	5 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME Power Factor	0.6
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Automatic Self-Test
UEM/EME Input Power (Max)	5 W
UEM/EME Protection	Class II
UEM/EME Dimensions (L x W x D) (mm)	158x325x48
UEM/EME Emergency Operation Test	Self-Test (ATS Type S)
Beam Angle - Lumi (°)	120

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



7 **7 Years**
Product Warranty
UK Only

2 **2 Years**
On-Site Warranty
Main-land UK Only

Kosnic 

Manot 2 in 1

07811 MAN0305/SST

Overview


The Manot LED Emergency Exit

Bulkhead is a self-contained, robust, maintained or non-maintained 3 hour emergency solution. Can be surface mounted, recessed or installed with a tilting bracket.

Comes with upward arrow exit sign for wall mounting and can be used without signs as an emergency light.



IP65

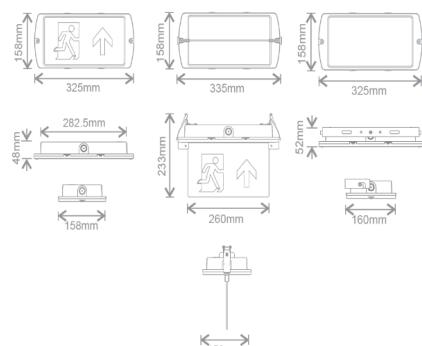

General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Protection	Class II
Rating	
Installation Area	Internal and External
UEM/EME Protection	Class II

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

