

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Mulu

Kosnic

08795 MUL0105/SST

Mulu Duo 5W Manual & Self-test EME light & exit sign 6500K, White

- Select manual or self-test mode via the internal dual-mode DIP switch
- Automatic Self-test conforming to BS-EN-62034
- To adjust green LED indicator brightness, press and hold the test button for more than 2 seconds
- All legends included
- Maintained and non-maintained option
- 20mm Conduit entry
- IP65 and IK10 (vandal resistant) for internal & external uses
- Dual entry push-wire terminal block for easy loop-in loop-out wiring
- BESA box fitting points



Overview

Mulu LED Emergency Exit Sign or Emergency Bulkhead Luminaire is a self-contained, multi-purpose, non-maintained or maintained 3-hour emergency luminaire solution. It can be used with or without the emergency exit graphics and is supplied with adaptable self-adhesive graphics for escape routes guidance.



IP65



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: ABS, Diffuser: Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 60598-2-22:2022, EN 62034:2012, EN 62471:2008, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023

Technical Summary

Product Code	MUL0105/SST
Lumens Output Maximum	80 lm
Emergency Luminous Flux	160 lm
Maintained Luminous Flux	160 lm
Total Product Weight	0.45 kg
Dimensions (L x W x D) (mm)	352x110x67
BESA Entry	True
Conduit Entry 20mm	Yes
UEM/EME Battery Life	5 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME Power Factor	0.58
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Manual & Automatic Self-Test
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	5 W
UEM/EME Protection	Class II
UEM/EME Dimensions (L x W x D) (mm)	110x352x67
UEM/EME Emergency Operation Test	Standard & Self-Test
Beam Angle - Lumi (°)	120 °

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Mulu



08795 MUL0105/SST

Accessories

Product Code	Description
BATS18LFP1	Battery for DD EME 2, Doxa 2 & EME light 2 in 1, Temp sensor


Overview

Mulu LED Emergency Exit Sign or Emergency Bulkhead Luminaire is a self-contained, multi-purpose, non-maintained or maintained 3-hour emergency luminaire solution. It can be used with or without the emergency exit graphics and is supplied with adaptable self-adhesive graphics for escape routes guidance.



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: ABS, Diffuser: Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

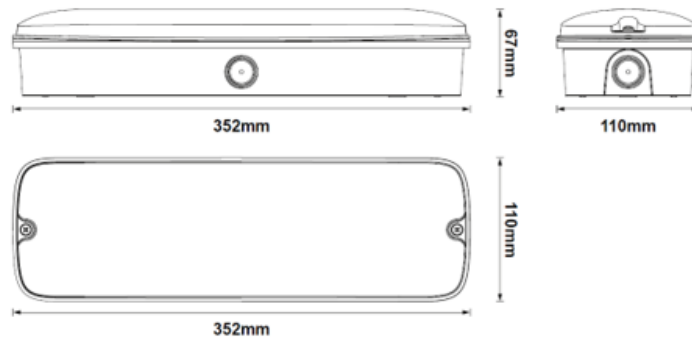

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK