


QUOTATION: 160226/NMP04

Item 1 (TTS1018X1284*)

Series TT - Three-phase isolation transformer

Technical Characteristics

Rating	2 kVA
Input voltage	380 V
Output voltage	230 V
Frequency	50/60 Hz
Connection group	DD0
Protection degree	IP-00
Cooling	ANAN
Ambient temperature	45 °C
Temperature rise	Class F - 155°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Efficiency (%)	93,5
Noise level (dB)	< 45
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE UL 5085-1 / UL 5085-2 CAN/CSA C22.2 No 66.1-06, CAN/CSA C22.2 No 66.2-06
Certifications	UL RECOGNIZED - CONSTRUCTION ONLY - Component FILE: E532753

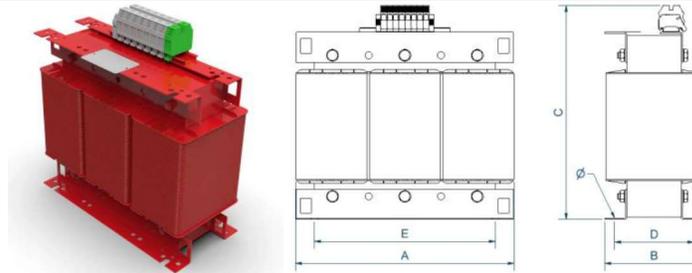

Item	Reference*	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Ø (mm)	Weight (kg)
1	TTS1018X1284	240	143	268	125	200	9Ø	23 kg

Remark: The dimensions stated at this quotation are approximated and can be modified without previous notification.
Polylux does not accept returns of custom-made products once delivered or cancellation once manufactured.