


### QUOTATION: 100125/NMP01

#### Item 1 (TTS0819X1083\*)

Series TT - Three-phase isolation transformer

#### Technical Characteristics

Rating	15kVA
Input voltage	400V
Output voltage	230V
Frequency	50/60 Hz
Connection group	DD0
Cover	Metal enclosure RAL 7035 (cat. C3 ISO 12994-2)
Protection degree	IP-23/IK-08
Cooling	ANAN
Ambient temperature	45 °C
Current inrush	8In
Temperature rise	Class F - 155°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Efficiency (%)	96,3
Noise level (dB)	< 45
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE

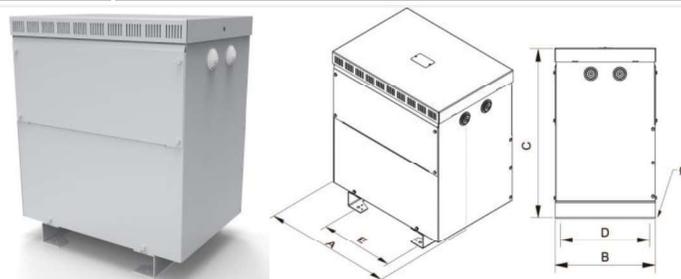

Item	Reference*	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Ø (mm)	Weight (kg)
1	TTS0819X1083	597	415	710	375	345	12Ø	137 kg

Remark: The dimensions stated at this quotation are approximated and can be modified without previous notification.  
Polylux does not accept returns of custom-made products once delivered or cancellation once manufactured.