


QUOTATION: 300326/MAZ08

Item 1 (TTS0326X1713*)

Series TT - Three-phase isolation transformer

Technical Characteristics

Rating	4 kVA
Input voltage	400 V
Output voltage	133 V+N
Frequency	50/60 Hz
Connection group	YYN0
Protection degree	IP-00
Cooling	ANAN
Ambient temperature	45 °C
Temperature rise	Class F - 155°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Efficiency (%)	95,4
Noise level (dB)	< 45
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE UL 5085-1 / UL 5085-2 CAN/CSA C22.2 No 66.1-06, CAN/CSA C22.2 No 66.2-06
Certifications	UL RECOGNIZED - CONSTRUCTION ONLY - Component FILE: E532753

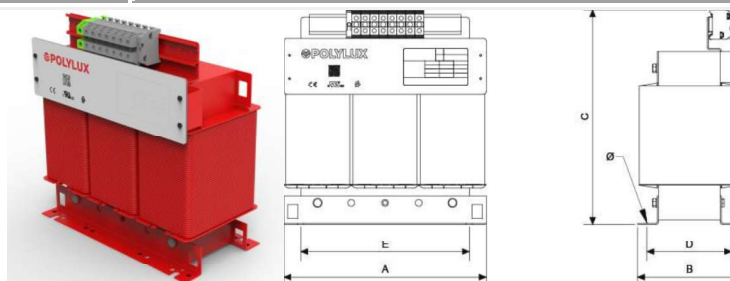

Item	Reference*	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	ø (mm)	Weight (kg)
1	TTS0326X1713	300	154	326	132	250	90	37 kg

Remark: The dimensions stated at this quotation are approximated and can be modified without previous notification.
Polylux does not accept returns of custom-made products once delivered or cancellation once manufactured.