


**QUOTATION: 180326/NMP02-C**

**Item 1 (TTS0419X0577\*)**

Series TT - Three-phase isolation transformer

**Technical Characteristics**

Rating	50 kVA
Input voltage	800 V
Output voltage	400 V+N (230V phase-neutral)
Frequency	50/60 Hz
Connection group	DYN11
Protection degree	IP-00
Cooling	AN
Ambient temperature	45 °C
Temperature rise	Class H - 180°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Efficiency (%)	95
Noise level (dB)	< 55
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 60076, CE

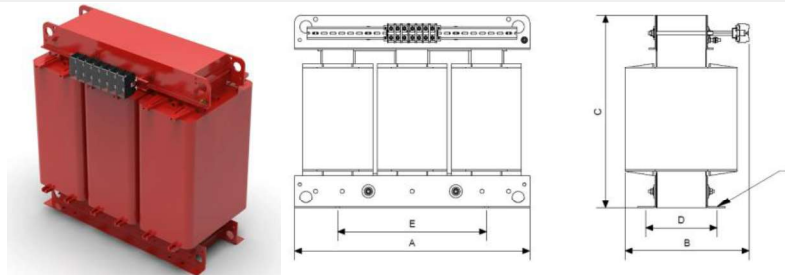

Item	Reference*	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	ø (mm)	Weight (kg)
1	TTS0419X0577	672	355	550	180	426	11Ø	257 kg

Remark: The dimensions stated at this quotation are approximated and can be modified without previous notification.  
Polylux does not accept returns of custom-made products once delivered or cancellation once manufactured.