

Type : 3EL112M4D-PD-B0-000**Date** : 08/01/2026

Power [kW] : 4.00
Input Voltage [V] : 400
Connection Type [Δ / Y] : Δ
Frequency [Hz] : 50
Pole Number : 4
Nominal Speed [rpm] : 1460
Nominal Current [A] : 8.05
Nominal Moment [Nm] : 26.2
Nominal Efficiency [η] : 88.6
Power Factor [$\cos\phi$] : 0.81
Locked Rotor Current [I_a/I_n] : 7.4
Locked Rotor Torque [M_a/M_n] : 2.8
Breakdown Torque [M_k/M_n] : 3.8
Motor Color : RAL 7031
Ambient Temperature : -15°C / +40°C

Efficiency Class : IE3
Duty Cycle : S1
Service Factor : 1.20
Frame Size : 112M
Weight [kg] : 33.9
Insulation Class : F [155°C]
Temperature Rise : B [80°K]
Protection Class : IP55
Vibration Severity Grade : A
Method of Cooling : IC411 (TEFC)
Direction of Rotation : Bidirectional
Balance : Half Key
Motor Thermal Protection : --
Altitude Above Sea Level : 1000m
Sound Pressure Level [dBA] : 58

ELECTRICAL DATA


Δ / Y	U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	η [%100]	η [%75]	η [%50]	Cos ϕ	Cl
Δ	400	50	4.00	1460	8.05	88.6	88.4	87.5	0.81	IE3
Y	690	50	4.00	1460	4.65	88.6	88.4	87.5	0.81	IE3
Δ	460	60	4.00	1765	6.98	89.5	89.9	88.9	0.80	IE3
Δ	460	60	4.55	1755	7.78	89.5	89.4	88.0	0.82	IE3

MECHANICAL DATA

Moment of Inertia [kgm²] : 0.01437
Bearing [DS / NS] : 6206ZZ C3 / 6206ZZ C3
Frame Material : Aluminum
Flange Type / Material : B3 / Aluminum
Cooling Fan Material : Plastic
End Shield Material : Aluminum

TERMINAL BOX

Terminal Box Material : Aluminum
Terminal Box Position : Top
Terminal Box Cable Entry : M25x1.5
Terminal Box Blind Cap : M25x1.5
Contact Screw Thread : M5

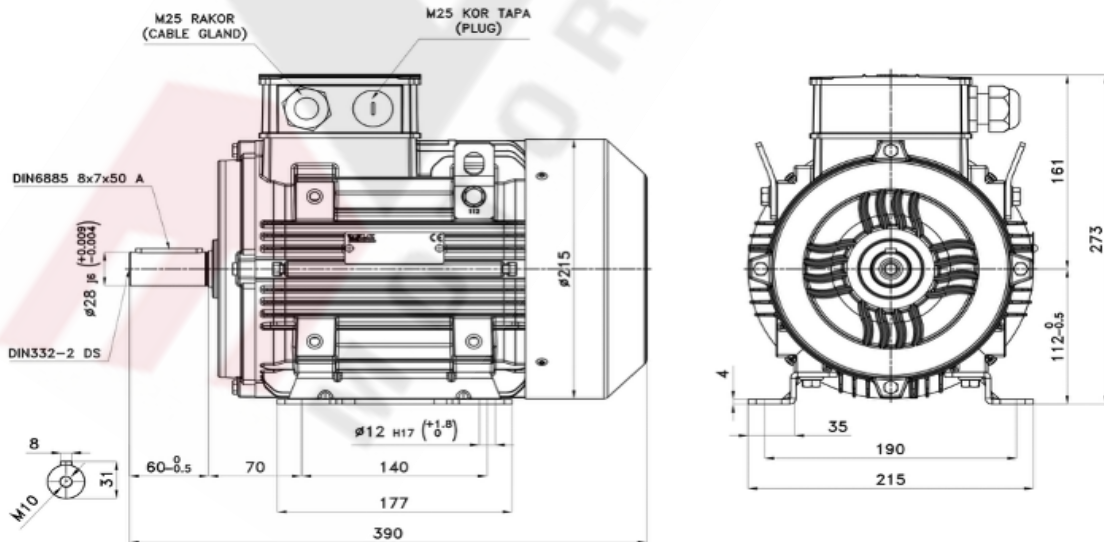MECHANICAL DIMENSIONS

Manufactured and tested in accordance with IEC 60034

FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.



ELK MOTOR SAN. ve TİC. A.Ş.
www.elkmotor.com.tr
+90 (282) 726 92 94

TECHNICAL DATASHEET ACCORDING TO
COMMISSION REGULATION (EU) 2019/1781
THREE PHASE INDUCTION MOTOR - SQUIRREL CAGE

Type : 3EL112M4D-PD-B0-000

Date : 08/01/2026


NAMEPLATE DATA

Power [kW]	: 4.00	Nominal Speed [rpm]	: 1460
Nominal Voltage [V]	: 400	Nominal Current [A]	: 8.05
Connection Type [Δ / Y]	: Δ	Nominal Moment [Nm]	: 26.2
Nominal Frequency [Hz]	: 50	Nominal Efficiency [η %]	: 88.6

THE POWER LOSSES AT SEVEN OPERATING POINTS ACCORDING TO COMMISSION REGULATION (EU) 2019/1781

Operating Point Number	Speed n/n_N [%]	Torque T/T_N [%]	Relative Power Losses P_L/P_N [%]	Efficiency η [%]
P ₁	90	100	13.5	87.0
P ₂	50	100	11.1	81.8
P ₃	25	100	10.6	70.2
P ₄	90	50	7.1	86.4
P ₅	50	50	5.2	82.9
P ₆	50	25	4.0	75.9
P ₇	25	25	2.6	70.3

MAP OF RELATIVE POWER LOSSES P_L/P_N [%]

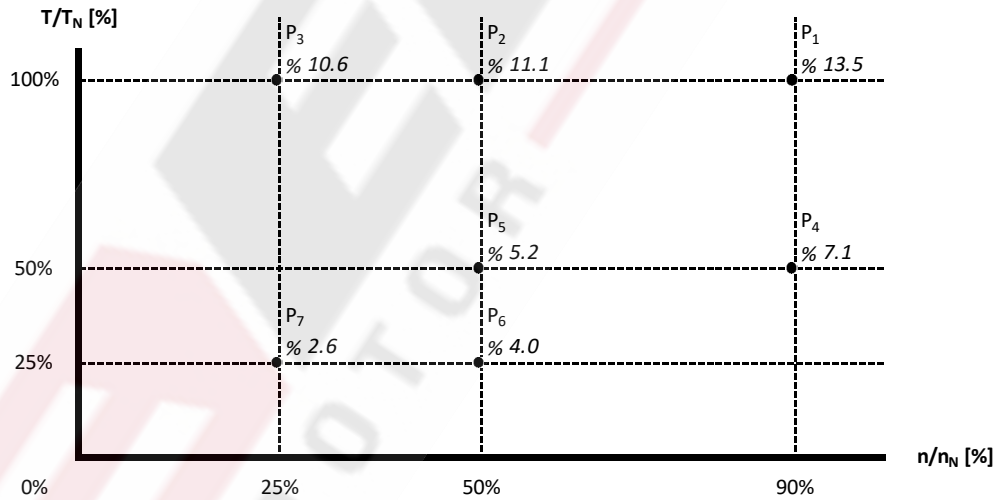

Manufactured and tested in accordance with IEC 60034


FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.

Motor Code : 3EL112M4D-PD-B0-000

Torque and Current Curves Related to Speed

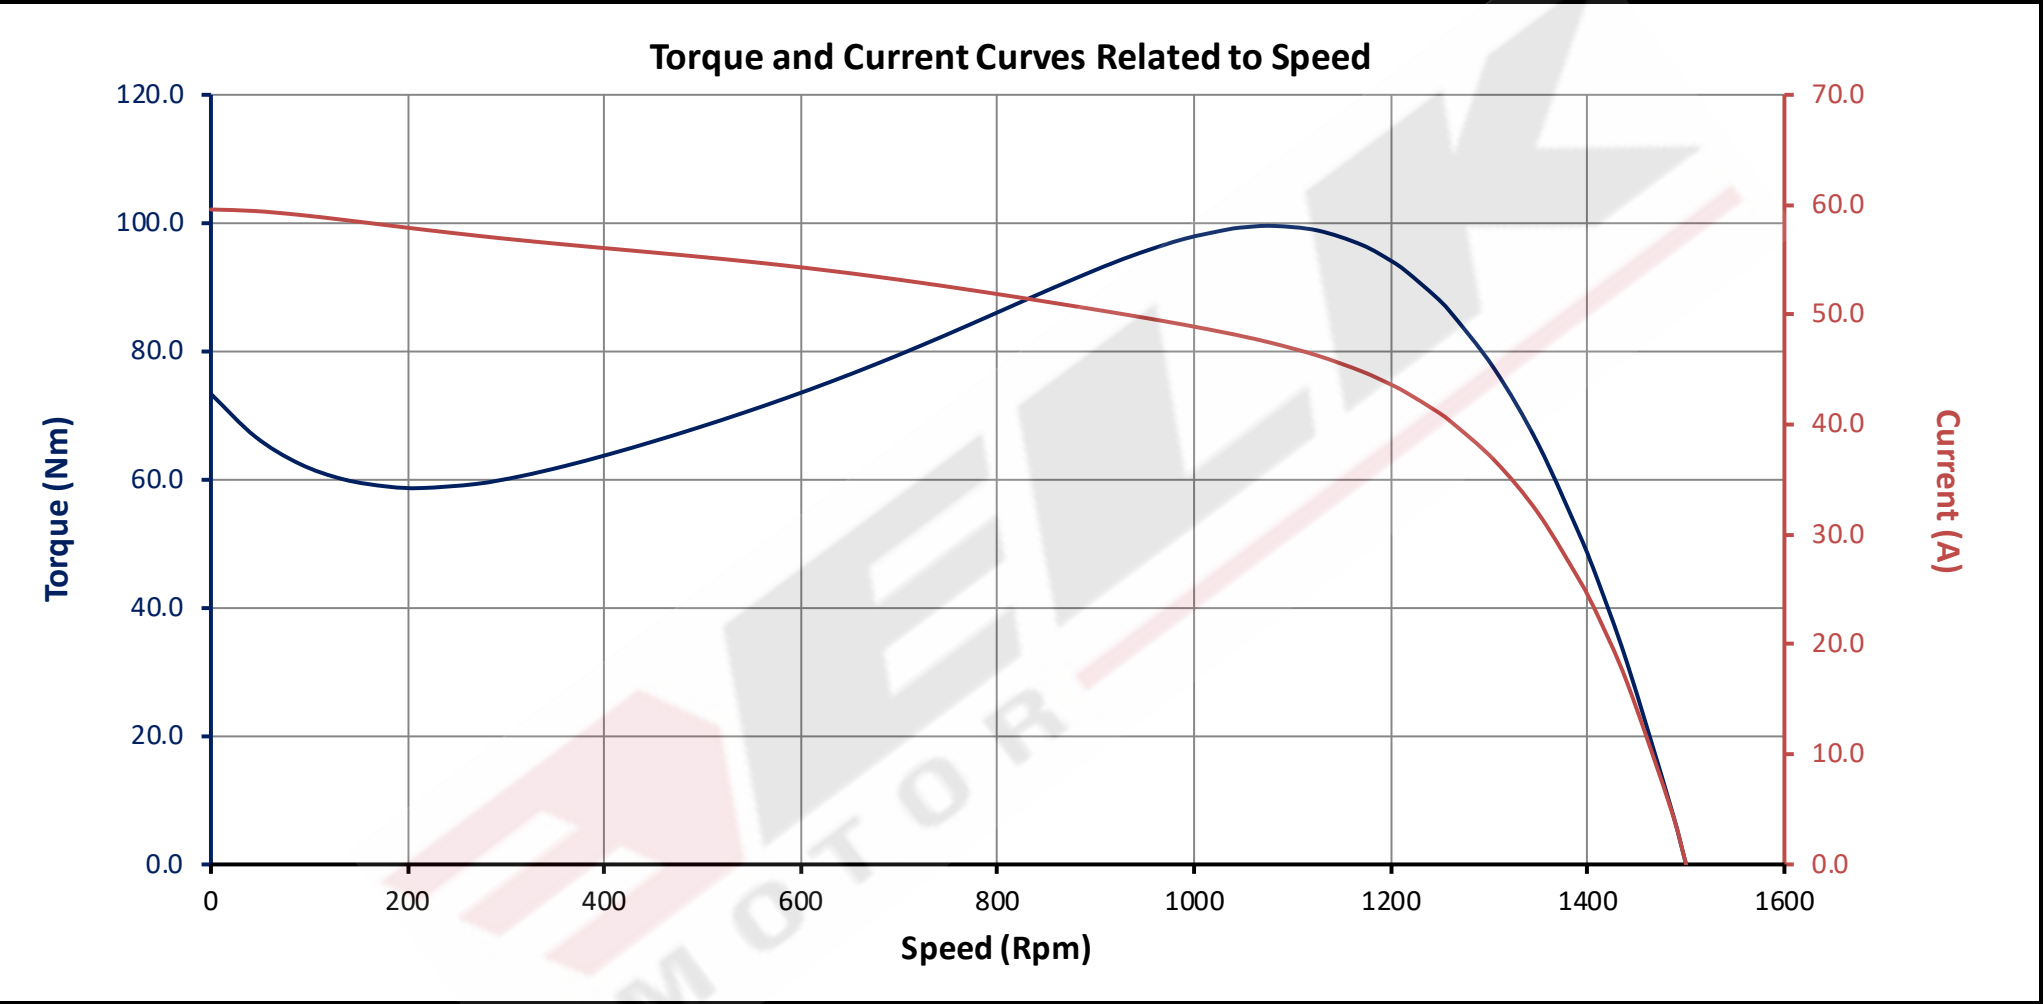

Motor Code : 3EL112M4D-PD-B0-000

Performance Curves Related to Rated Output

