


article#	<b>044-9</b>
article description	<b>CEE-plug 125A 4p 9h IP67 POWER TWIST</b>
description long	CEE-plug 125A 4p 9h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 4 (3P+PE) clock-position: 9h rated voltage/frequency: 200-250V~ / 50+60Hz contacts: brass nickel plated, with pilot pin connection technology: frame terminals with screws IP protection class: IP66/IP67
GTIN (EAN)	9003399048531
country of origin	AT
customs number	85366990
net weight	1.064 kg
packaging quantity	2
minimum order quantity	2

ETIM 10.0	EC000140
IEC-amperage	125 A
Number of poles	4
Voltage according to EN 60309-2	200-250 V (50+60 Hz) blue
Clock hour position	9 h
Identification colour	Blue
RAL-number	7046
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Cable entry	Gland nut
Suitable for cable diameter	22.5 – 50 mm
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

a	270 mm
b	131 mm
K (cable Ø)	22,5-50 mm
SW	81 mm
wire flexible	16-50 mm <sup>2</sup>
contact screws	450 Ncm
connecting screws	200 Ncm
strain relief	1500 Ncm
dismantling length	100 mm
stripping length	24-27 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C
IK-code *)	IK10

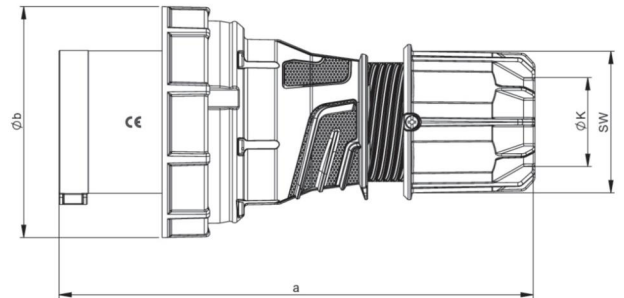

<https://www.pcelectric.at/shop/en/?func=detail&artnr=044-9>



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.